
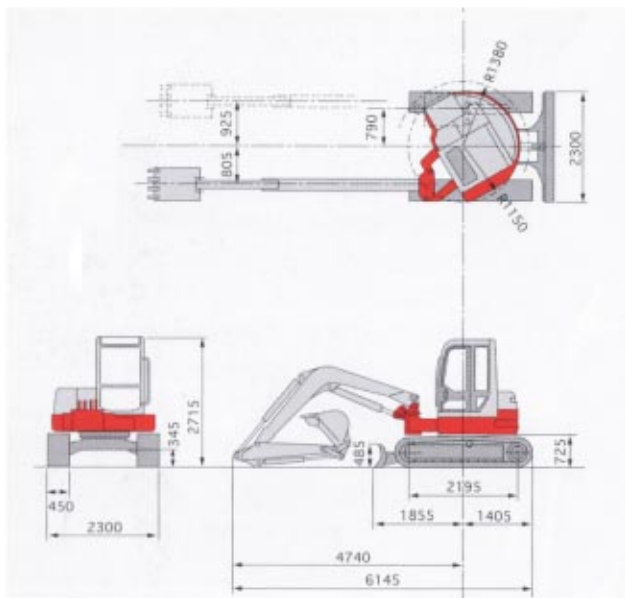


DIMENSIONS (mm)

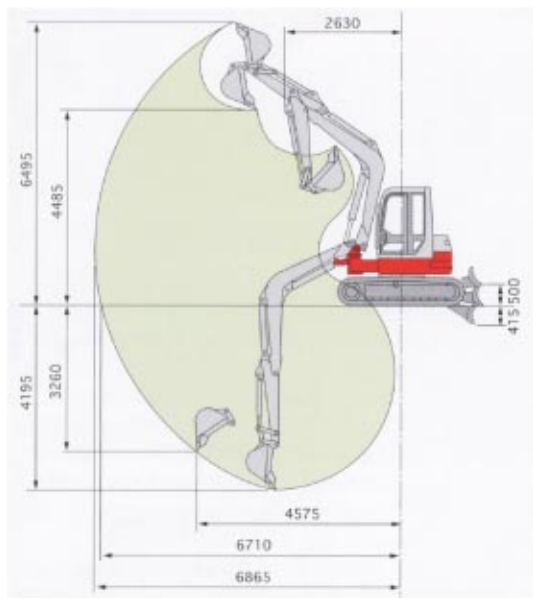

WORKING RANGES

	mm		mm
Max. digging depth	4195	Max. dig. radius	6867
Max. vertical digging depth	3260	Max. floor dig. radius	6710
Max. dump height	4485	Min. slew radius	2629
Max. dig. height	6495	Max. Bucket Offset RH / LH	927/805

SPECIFICATIONS (Cab, Rubber Tracked, Breaker Pippings Standard) (Steel Tracked: Option) (Tops/Fops Cabin/Canopy for Export)

Machine weight	7900 kg
----------------	---------

BUCKET	
Bucket capacity	0.174 m ³ (Struck) / 0.240 m ³ (Heaped)
Bucket width	750 mm

DIESEL ENGINE (water-cooled)	
Model	4TNV98
Fuel tank capacity	100 litres
Hydraulic tank capacity	108 litres

OVERALL DIMENSION (mm)	
Length (in transport)	6144 mm
Width	2300 mm
Height	2715 mm
Rear slew radius	1150 mm
Min. ground clearance	345 mm

BUCKET ATTACHMENTS	
Hydraulic tilting Hitch pick up	
Mud	
Trench	
General purpose	
Rock hammer	

PERFORMANCE

Traction speed	3.2/5.8 km/hr
Gradeability	30°/57%
Max. dig power bucket	53.2 kN
Max. dig power arm	46.8 kN

DOZER BLADE (mm)	
Width x Height	2300 x 500 mm
Operating range up/down	500/415 mm

OFF-SET DIG FUNCTION	
Type	Boom Offset
Swing angle RH / LH	15° / 30°

TRACTION SYSTEM (mm)		
Crawler (Track)	Rubber/Steel	
Track Width	RT	450 (450)

SHERRIN Rentals

BRISBANE • DARWIN • TOOWOOMBA • SUNSHINE COAST

132 138

Email - info@sherrinrentals.com.au Web - www.sherrinrentals.com.au

8 Tonne Excavator