


CONTROL Pilot pressure operated joysticks and pedals with detachable lever provide almost effortless and fatigueless operation.

Pilot control	Two joysticks with one safety lever (LH): Swing and arm, (RH): Boom and bucket (ISO)
Travelling and steering	Two levers with pedals
Engine throttle	Electrical, Dial type
Lights	Two lights mounted on the boom and one in the tool box

DIMENSIONS

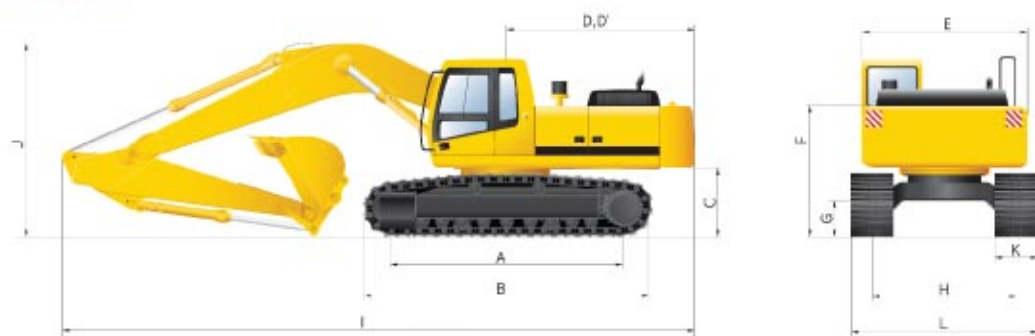

	mm			mm	
H	Boom length	6450	K	Track shoe width	600
	Arm length	3200	L	Overall width	3280
I	Overall length	10 980	D,D'	Tail swing	3330
J	Overall height of boom	3380			

SPECIFICATIONS


Diesel engine	Water-cooled
Model	Cummins C8.3-C
Fuel tank capacity	480 litres
Hydraulic tank	210 litres
Fuel consumption rate (av. 75-85% full capacity)	22-26 litres/hour

PERFORMANCE

Gradeability	35° / 70%
Bucket digging force	8.5 (9.27) (SAE) tonne
Operating weight	32 200 kg
Ground pressure	0.62 kgf/cm ²

BUCKET ATTACHMENTS

Quick hitch	Yes
Hitch pick up	332 mm
Mud	2000 mm
Trench	600 mm
Batter	2000 mm
General purpose	1400 mm
Rock hammer	Yes
Rock grab	Yes
Compaction wheel	Yes
Ripper	Yes

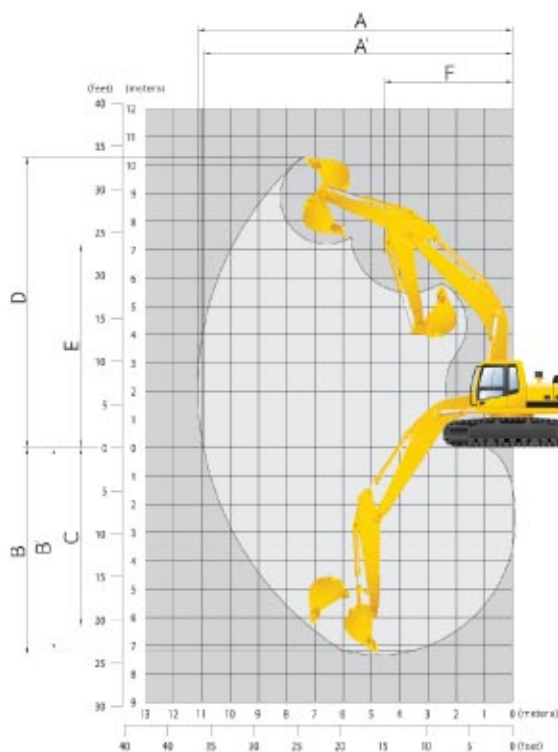

WORKING RANGES

	mm	
A	Max. digging reach	11 140
A'	Max. digging reach on ground	10 940
B	Max. digging depth	7370
C	Max. vertical wall digging depth	6360
D	Max. digging height	10 310
E	Max. dumping height	7240
F	Min. swing radius	4470

SHERRIN Rentals

BRISBANE • DARWIN • TOOWOOMBA • SUNSHINE COAST

132 138

Email - info@sherrinrentals.com.au Web - www.sherrinrentals.com.au

32 Tonne Excavator