


## DIMENSIONS

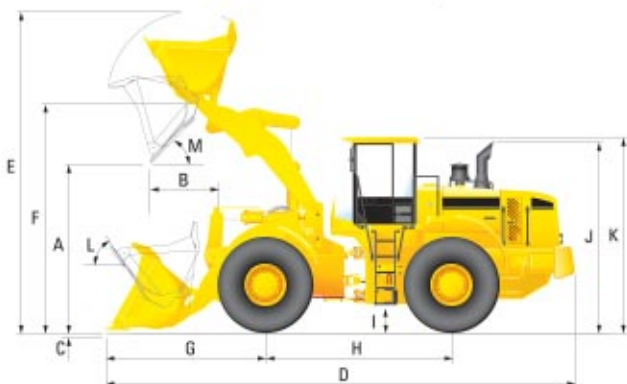

|   |  | mm                                   |
|---|--|--------------------------------------|
|   | Bucket type  | General purpose bolt-on cutting edge |
| A | Dumping clearance at max. height and 45° dump angle. | 2860                                 |
| B | Reach  | Full lift                            |
|   |  | 7ft height                           |
| C | Digging depth  | 95                                   |
| D | Overall length                                       | on ground                            |
|   |  | at carry                             |
| E | Overall height (fully raised)                        | 5250                                 |
| F | Bucket pivot max. height                             | 3910                                 |
| G | Front overhang                                       | 2520                                 |
| H | Wheelbase  | 3030                                 |
| I | Ground clearance                                     | 410                                  |
| J | Height over exhaust                                  | 3130                                 |
| K | Height over cab                                      | 3300                                 |
| L | Roll-back angle                                      | on ground                            |
|   |  | at carry                             |
| M | Dump angle   | deg                                  |
|   |  | deg                                  |
|   | Clearance circle                                     | 12350                                |
| N | Overall width  | 2740                                 |
|   | Operating weight                                     | 13800 kg                             |

## SERVICE REFILL CAPACITIES

|                |            |
|----------------|------------|
| Fuel Tank      | 295 litres |
| Hydraulic Tank | 130 litres |

## TYRES

|      |                               |
|------|-------------------------------|
| Type | Tubeless, loader design tyres |
|------|-------------------------------|

## ENGINE

|                  |                         |
|------------------|-------------------------|
| Make/Model       | CUMMINS QSB5.9-C        |
| Gross power      | 173HP(129 kW) / 2200rpm |
| Maximum power    | 178HP(133 kW) / 2000rpm |
| No. of cylinders | 6                       |
| Air cleaner      | Dry, dual elements      |

**TRANSMISSION** 4 speed forward and 3 speed reverse. Auto change (if fitted)

## Travel speed km/h

|         |     |      |         |     |      |
|---------|-----|------|---------|-----|------|
| Forward | 1st | 7.4  | Reverse | 1st | 7.8  |
|         | 2nd | 12.1 |         | 2nd | 12.8 |
|         | 3rd | 23.7 |         | 3rd | 25.0 |
|         | 4th | 37.0 |         |     |      |

## AXLES

|              |  |
|--------------|--|
| Drive system | Four-wheel drive system                    |
| Mount        | Rigid front axle and oscillating rear axle |
| Differential | Torque proportional differential           |

## BUCKET CAPACITIES

|               |                   |
|---------------|-------------------|
| Bucket heaped | 2.3m <sup>3</sup> |
| Bucket struck | 2.3m <sup>3</sup> |

# SHERRIN Rentals

BRISBANE • DARWIN • TOOWOOMBA • SUNSHINE COAST

## 132 138

Email - [info@sherrinrentals.com.au](mailto:info@sherrinrentals.com.au) Web - [www.sherrinrentals.com.au](http://www.sherrinrentals.com.au)



# 23 Wheel Loader